



## KÖSTER Joint Tape 30


Technical Data Sheet J 830 020

Issued: 2019-09-06

### Elastic sealing tape for waterproofing joints and irregular cracks, 1 mm x 300 mm

#### Features

KÖSTER Joint Tape 30 is a thermoplastic tape for sealing expansion and dilatation joints and irregular cracks. KÖSTER Joint Tape 30 is UV resistant, highly elastic, and can withstand extreme movements. The Joint Tape System consists of the KÖSTER Joint Tape 30 and KÖSTER KB-Pox Adhesive (a 2 component epoxy based, thixotropic high performance adhesive) which are applied as a system.

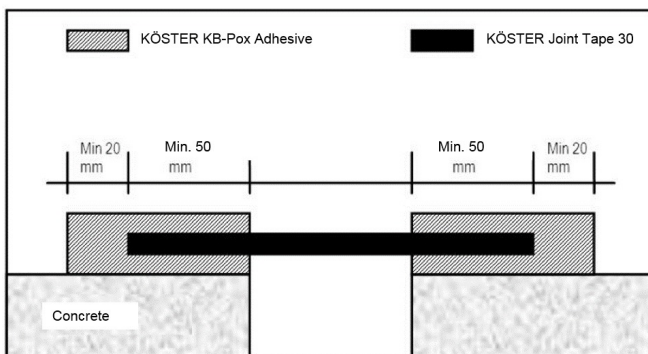

#### Technical Data

Width		30 cm
Color		RAL 7045 grey
Elongation at break	EN ISO 527-3	> 400 %
Tear growth resistance	EN 12310-2	> 600 N / cm
Tear resistance lengthwise	EN ISO 527-3	> 9 MPa
Tear resistance crosswise	EN ISO 527-3	> 6 MPa
Resistance to cold / heat	SIA 280/3	- 30 °C to +8 °C
Hardness (Shore A)	ISO 868	80
Resistance to bitumen	DIN 16726	Resistant
Peel of strength		> 20 N / 10 mm
Resistance to water pressure	EN 1928	> 8.0 bar
Resistance to UV radiation	SIA V280/10	> 7500 hours
Chemical resistance		Water and bitumen based waterproofing products, water, Sea water, waste water, UV radiation, hydrolysis, micro-organisms
pH resistance		pH = 2 to 10 (below + 30 °C) pH = 5 to 10 (below + 40 °C) pH = 6 to 8 (below + 60 °C)
Limited resistance to		Acids and alkalis, organic solvents such as Esters and Ketons

#### Fields of Application

- Waterproofing horizontal and vertical dilatation joints
- Waterproofing wide and irregular cracks
- Connection joints of slabs and walls
- Suited substrates are concrete, mortar, wood, metal, steel, aluminium, glass fiber reinforced plastics, epoxy mortar, natural and artificial stone, and many other building materials.

#### Typical application areas

- Terraces and balconies
- Facades
- Wet rooms
- Foundations and curtain walls
- Concrete pipes
- Water basins
- Swimming pools
- Dilatation joints
- Tunnels
- Park houses
- Power plants
- Wastewater tanks, waste water treatment plants, etc.

#### Substrate

The information contained in this technical data sheet is based on the results of our research and on our practical experience in the field. All given test data are average values which have been obtained under defined conditions. The proper and thereby effective and successful application of our products is not subject to our control. The installer is responsible for the correct application under consideration of the specific conditions of the construction site and for the final results of the construction process. This may require adjustments to the recommendations given here for standard cases. Specifications made by our employees or representatives which exceed the specifications contained in this technical guideline require written confirmation. The valid standards for testing and installation, technical guidelines, and acknowledged rules of technology have to be adhered to at all times. The warranty can and is therefore only applied to the quality of our products within the scope of our terms and conditions, not however, for their effective and successful application. This guideline has been technically revised; all previous versions are invalid.

